MEMXPRO mSATA E231 Series

1TB high capacity & wide temperature




Features

- SATA III, compliant with JEDEC MO-300A
- MLC, up to 1TB capacity
- Extended/wide temp. solutions
- Built-in ECC and OCP/OVP
- NCQ/TRIM/SMART support
- mSMART storage device monitoring

Specification

Product Model	mSATA E231
Interface	SATA III
Form Factor	mSATA (M0300A)
Flash Type	MLC eMMC
Max. Channel	8
Density	512GB~1TB
Sequential R/W (MB/sec, max.)	517/407
Operating Temperature	-25°C~+85°C/-40°C~+85°C
Max. Power Consumption	3.63W (3.3Vx1100mA)
Dimension (L x W x H/mm)	50.8x29.85x3.75
Operating Voltage	3.3V±5%
Storage Temperature	-55°C~+95°C
External DRAM Buffer	N/A
Thermal Sensor	\checkmark
DEVSLP Mode	N/A
ATA Security	\checkmark
S.M.A.R.T.	\checkmark
TRIM	\checkmark
Vibration	20G (7~2K Hz)
Shock Resistance	1500G@0.5ms
MTBF	>3 million hours

Dimensions

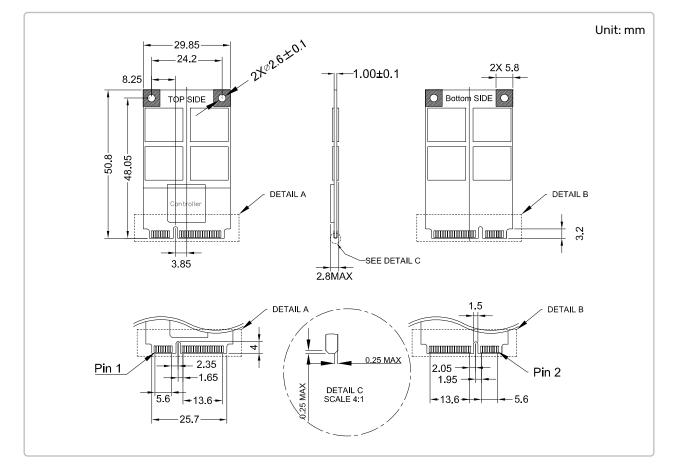

Ordering Information

Capacity	Extended (-25°C~85°C)	Industrial (-40°C~+85°C)
512GB	FEMSS-E1GT2M084E1	FEMSS-E1GT2M084W1
1TB	FEMSS-010T2M088E1	FEMSS-010T2M088W1



MEMXPRO Inc. info@memxpro.com www.memxpro.com

©MEMXPRO Inc. MEMXPRO reserves the right to change products, information and specifications without notice and is provided on an "AS IS" basis, without warranties of any kind. Products and specifications discussed herein are for reference purposes only. No license of any patent, copyright, mask work, trademark or any other intellectual property right is granted by one party to the other party under this document, by implication, estoppels or otherwise. For updates or additional information about MEMXPRO products, please contact MEMXPRO office.